

SQL85 Luminaire

General Purpose

Zone 1





10 years warranty
100,000 hours lifetime expectancy
Maintenance free
Sealed for life
Category 2 (Zone 1 and 21)
IP66

Article number	Wattage	Voltage	Lens	Version	Weight (Kg)
SQL-01-85-C	85W	220-240V	Clear glass	JB	15
SQL-01-85-F	85W	220-240V	Frosted glass	JB	15
SQL-02-85-C	85W	100-120V	Clear glass	JB	15
SQL-02-85-F	85W	100-120V	Frosted glass	JB	15

Features:

- ✚ Marine alloy (**sealed for life construction**)
- ✚ Borosilicate lens: clear or frosted
- ✚ 2 pack epoxy paint finish
- ✚ 85W Induction light source
- ✚ 100,000hours lifetime expectancy
- ✚ **10 years warranty**
- ✚ Universal burning position
- ✚ Immediate ignition and re-ignition
- ✚ Ex II 2 GD, Ex de IIC T4 IP66
- ✚ Certificate: SIRA00ATEX1047X
- ✚ Supply voltage: 200-277V 0/50/60Hz, ±10%
- ✚ Ambient temperature: -20°C to +40°C
- ✚ EExe junction box: 4x4mm², single phase looping
- ✚ 2xM20 entries
- ✚ Mounting fixing strap as standard
- ✚ Optional:
 - 100-120 V 0/50/60Hz, ±10%
 - U-bracket
 - Protection cage
 - External reflector (windsock)
 - Sealing polymer for junction box
 - Coloured lens

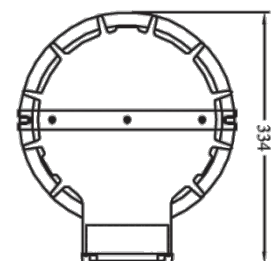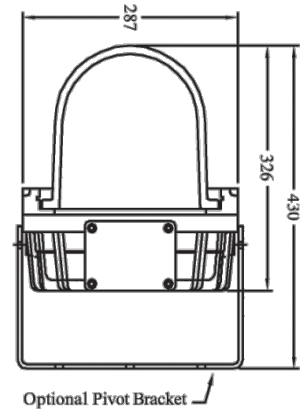

SAFE answers to HAZARDOUS questions