

LED Obstruction Light

CAP 168 MIOL - Steady



**In compliance with
ANO 2009 - Article 219**

ATEX Category 2



**Ex II 2 GD Ex de IIC T4
T135°C IP65**

Certified for use in zone 1 and 21

Article number	Wattage	Voltage	Lens	Version	Weight (Kg)
EVde-5-03-CAP_MC	60W	20/55Vdc	Borosilicate	JB + bracket	7.0 + 16.0
EVde-5-03-CAP_MTC	60W (TWIN)	20/55Vdc	Borosilicate	JB + bracket	8.0 + 16.0
EVde-5-01-CAP_MC	60W	230Vac	Borosilicate	JB + bracket	7.0 + 16.0
EVde-5-01-CAP_MTC	60W (TWIN)	230Vac	Borosilicate	JB + bracket	8.0 + 16.0



Features:

- ✚ State-of-the-art high-flux LED technology for NIGHT use: RED
- ✚ Vertical beam radiation in compliance with CAP 168 (2011) MIOL and The Air Navigation Order 2009, Part 28, Article 219 (Lighting of en-route obstacles):
±4° @2000cd ±20%
- ✚ Shock and vibration resistant
- ✚ Flameproof alloy housing
- ✚ Ex II 2 GD, Ex de IIC T4 IP65
- ✚ Certificate: INERIS01ATEX0019X
- ✚ Supply voltage: 24Vdc or 230Vac
- ✚ -30°C to +55°C ambient temperature
- ✚ Polyurethane paint finish
- ✚ Stainless steel hardware
- ✚ Stainless steel mounting bracket
- ✚ Optional:
 - 316SS adjustable mounting bracket
 - Anti-bird protection guard
 - Twin MIOL in same housing

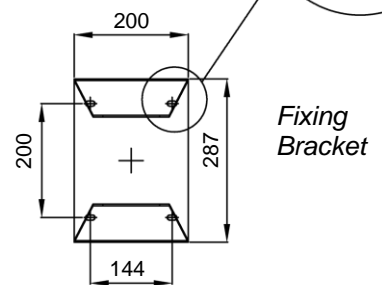


Beacon Front

Beacon Side

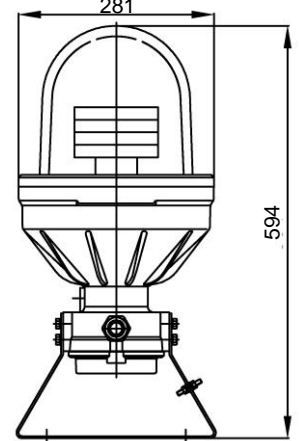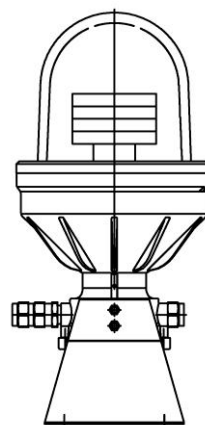

Control Box

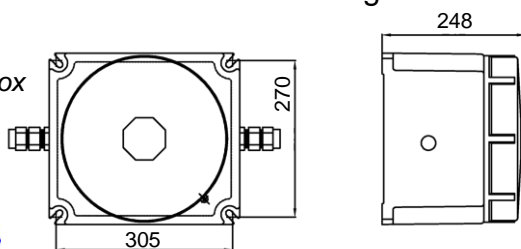

SAFE answers to HAZARDOUS questions