

SQL85 Obstruction Light

CAP 168 LIOL A (10cd)





***In compliance with
CAP437, Chapter 4, para 4.3***

**10 years warranty
100,000 hours lifetime expectancy
Maintenance free
IP66 - Sealed for life
Category 2 (Zone 1 and 21)
10cd minimum**

Article number	Wattage	Voltage	Lens	Version	Weight (Kg)
SQL-01-85-CAP_A	85W	220-240V	RED	JB	15
SQL-02-85-CAP_A	85W	100-120V	RED	JB	15

Features:

- ✚ Marine alloy (***sealed for life construction***)
- ✚ Borosilicate lens, Coated RED
- ✚ 2 pack epoxy paint finish
- ✚ 85W Induction light source
- ✚ Vertical beam radiation in compliance with CAP 168, LIOL Group A and CAP437 Chapter 4 para.4.3: +0° to +30° @ 10cd
- ✚ 100,000hours lifetime expectancy, ***10 years warranty***
- ✚ Universal burning position
- ✚ Immediate ignition and re-ignition
- ✚ Ex II 2 GD, EEx de IIC T5 IP66
- ✚ Certificate: SIRA00ATEX1047X
- ✚ Supply voltage: 200-277V 0/50/60Hz, ±10%
- ✚ Ambient temperature: -20°C to +40°C
- ✚ Terminal box: 4x4mm², single phase looping
- ✚ 2xM20 entries
- ✚ Mounting fixing strap as standard
- ✚ Optional:
 - 100-120 V 0/50/60Hz, ±10%
 - U-bracket
 - Protection cage

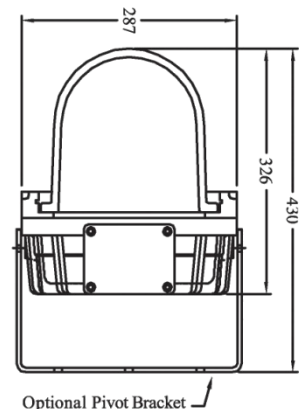

SAFE answers to HAZARDOUS questions