


# LED Obstruction Light

## ICAO MIOL type B\_C

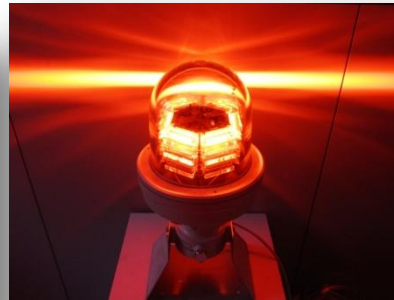


**ATEX Category 2**

**Ex II 2 GD Ex de IIC T4  
T135°C IP65**


**Certified for use in zone 1 and 21**

Order Code

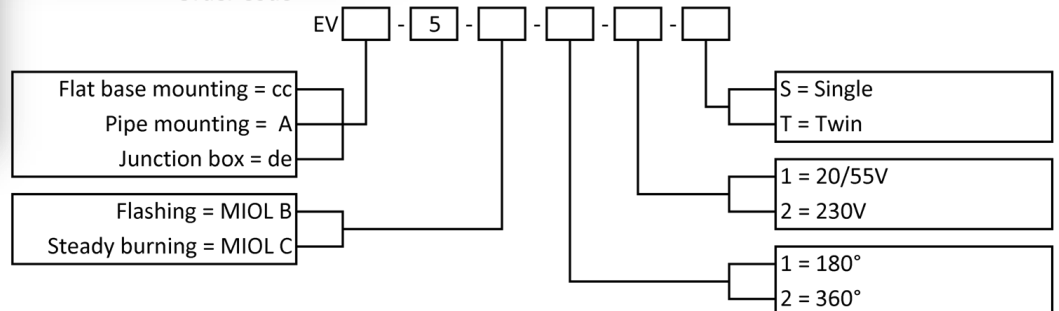



### Features:

- ✚ State-of-the-art high-flux LED technology for NIGHT ONLY use: RED
- ✚ Vertical beam radiation in compliance with ICAO, Annex 14 Volume 1, 4<sup>th</sup> Edition, Nov 2004:
  - +3° @2000cd ±25%
  - MIOL C: Steady burning; MIOL B: 20-60fpm
- ✚ Shock and vibration resistant
- ✚ Flameproof alloy housing
- ✚ Ex II 2 GD, Ex d/de IIC T4 IP65
- ✚ Certificate: INERIS01ATEX0019X
- ✚ -30°C to +55°C ambient temperature
- ✚ Polyurethane paint finish
- ✚ Stainless steel hardware and bracket
- ✚ IP66 with grease applied
- ✚ Optional:
  - 316SS adjustable mounting bracket
  - Anti-bird protection guard

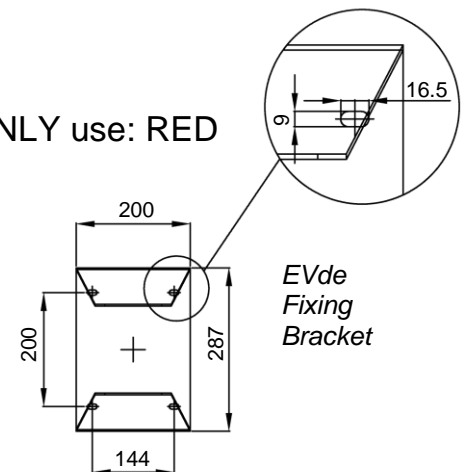

Beacon Front

Beacon Side

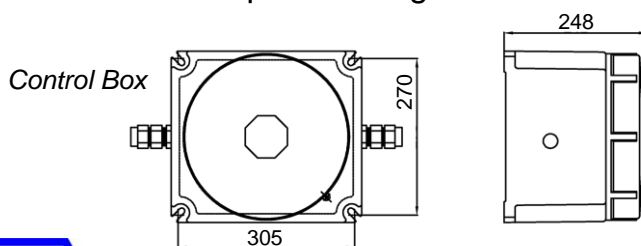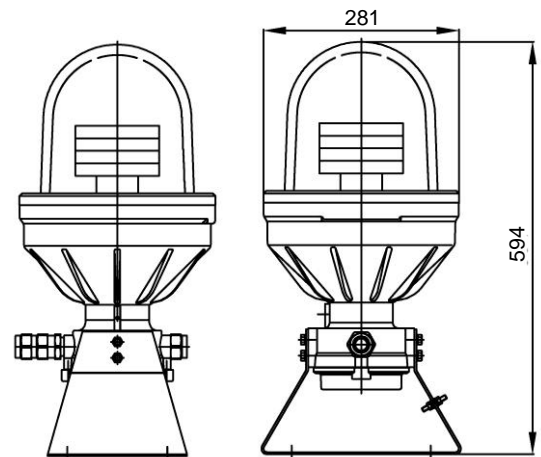

**SAFE answers to HAZARDOUS questions**