

# SQL85 Luminaire

## 32cd Obstruction

## Zone 1





**10 years warranty**  
**100,000 hours lifetime expectancy**  
**Maintenance free**  
**Sealed for life**  
**Category 2 (Zone 1 and 21)**  
**IP66**  
**32cd low intensity**

Article number	Wattage	Voltage	Lens	Version	Weight (Kg)
SQL-01-85-R	85W	220-240V	RED	JB	15
SQL-02-85-R	85W	100-120V	RED	JB	15

### Features:

- ✚ Marine alloy (**sealed for life construction**)
- ✚ Borosilicate lens, Coated RED
- ✚ 2 pack epoxy paint finish
- ✚ 85W Induction light source
- ✚ 100,000hours lifetime expectancy
- ✚ **10 years warranty**
- ✚ Universal burning position
- ✚ Immediate ignition and re-ignition
- ✚ Ex II 2 GD, EEx de IIC T5 IP66
- ✚ Certificate: SIRA00ATEX1047X
- ✚ Supply voltage: 200-277V 0/50/60Hz, ±10%
- ✚ Ambient temperature: -20°C to +40°C
- ✚ Terminal box: 4x4mm<sup>2</sup>, single phase looping
- ✚ 2xM20 entries
- ✚ Mounting fixing strap as standard
- ✚ Optional:
  - 100-120 V 0/50/60Hz, ±10%
  - U-bracket
  - Protection cage
  - External reflector (windsock)
  - Sealing gel for junction box

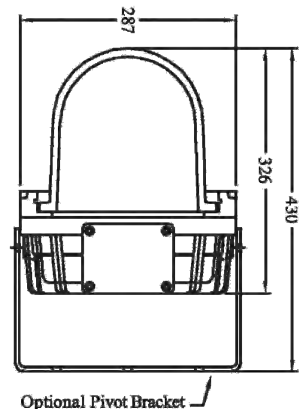

**SAFE answers to HAZARDOUS questions**