

5 year warranty

XTR-ABS-LED

IP 66



LED luminaire for use in areas where chemical disinfectants are used and animal husbandry.

**Applications:** Food processing, animal husbandry.

**Body:** Acrylonitrile Butadiene Styrene (ABS), Grey

**Diffuser:** Copolyester (PCT-G), Opal

**LED modules (calculated):** L80B20 @ $t_a 35^{\circ}\text{C}$  - 69,000hrs

**Colour temperature (K):** 4000

**SDCM:**  $\leq 3$

**Voltage:** 220-240V 50/60Hz

**Ingress protection:** IP66

**Impact resistance:** IK09 (10Joules)

**Entry:** 2 x M20 (Nylon gland and blanking plug included)



**Termination:** Screwless 3-pole terminal block, 2.5mm<sup>2</sup> max

**Mounting:** Ceiling/wall mounted (bracket included)

**Optional:** - DALI dimmable driver

- Suspension bracket

- 3 phase through wiring 5x1.5mm<sup>2</sup>

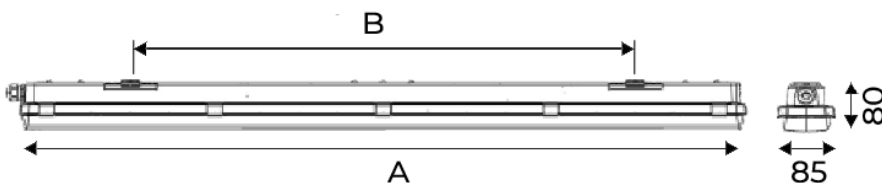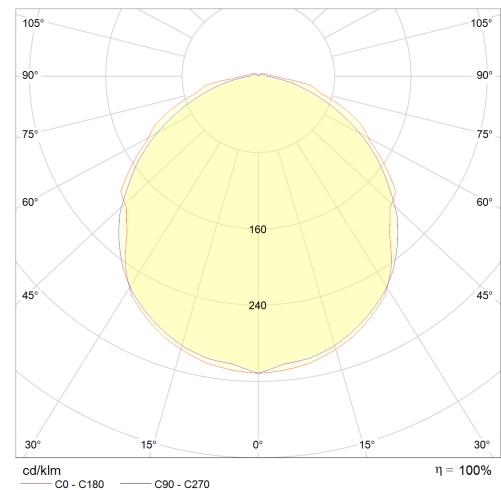

Order Number	Lumen (lm)	Power (W)	Ta Min/Max (°C)	Dimensions Ax B (mm)	Weight (kg)
XTR-ABS-LED-4550-4FT-4K	4368	29.8	-20/+35	1152x800	1.45
XTR-ABS-LED-5650-5FT-4K	5424	37.8	-20/+35	1432x970	2.00
XTR-ABS-LED-7850-4FT-4K	7536	51.0	-20/+35	1152x800	1.45
XTR-ABS-LED-11300-5FT-4K	10,848	74.4	-20/+35	1432x970	2.00